

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
13 May 2004 (13.05.2004)


PCT

(10) International Publication Number  
**WO 2004/040180 A1**

- (51) International Patent Classification<sup>7</sup>: **F16K 31/18**, 31/34, 21/18, 31/20, 24/00, 24/02, 17/02, B67D 5/34
- (21) International Application Number:  
PCT/AU2003/001436
- (22) International Filing Date: 30 October 2003 (30.10.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
2002952390 31 October 2002 (31.10.2002) AU
- (71) Applicant (for all designated States except US): **MULTI-FLO AUSTRALIA PTY LTD** [AU/AU]; 4 Daniel Street, Caloundra, Queensland 4551 (AU).
- (72) Inventor; and  
(75) Inventor/Applicant (for US only): **SMIT, Peter, Martin** [AU/AU]; 9 Killeen Close, Buderim, Queensland 4556 (AU).
- (74) Agent: **FISHER ADAMS KELLY**; Level 13 AMP Place, 10 Eagle Street, Brisbane, Queensland 4000 (AU).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: VALVE ASSEMBLY

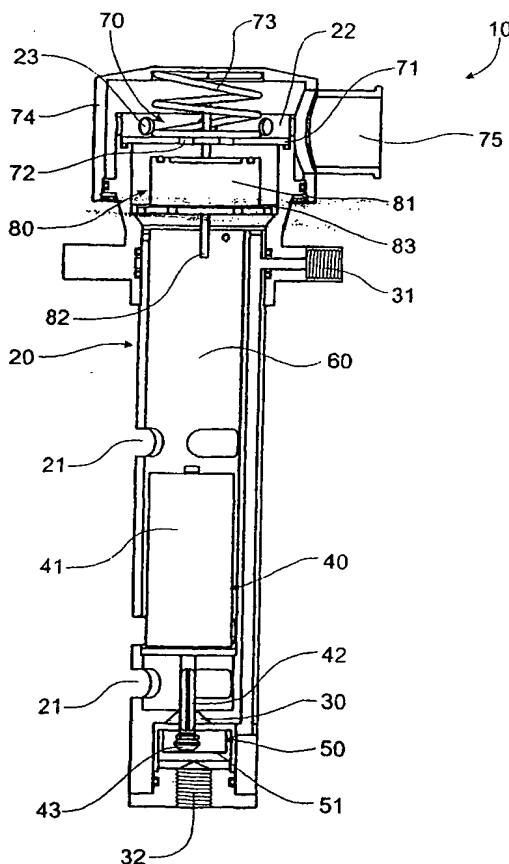

(57) Abstract: A valve assembly (10) able to be mounted with a liquid container, the valve assembly comprising: a housing (20) having a passageway (60) that extends through the housing; a breather float valve (80) mounted within the housing, the breather float valve movable between an open position to allow gas to pass through the passageway and a closed position that prevents liquid from passing through the passageway; a liquid inlet (30), forming part of the housing, the liquid inlet allowing fluid to pass into the housing; and an inlet float valve (41) mounted within the housing, the inlet float valve movable between an open position that permits the flow of liquid through the liquid inlet and a closed position that prevents the flow of fluid through the liquid inlet.